




Tous les raccords femelles sont livrés avec un joint.


Mâle



Perrot	D	E
50	53	78
70	74	105
89	93	134
108	113	158
133	138	180
159	164	210
216	225	310



Femelle



Perrot	A	B	C	Angle Montage
50	53	85	20	30°
70	74	106	20	30°
89	93	136	15	30°
108	113	161	15	30°
133	138	189	13	30°
159	164	222	10	30°
216	220	310		

Collier avec crochets (galva)



IPE 070 003	70
IPE 089 003	89
IPE 108 003	108
IPE 133 003	133
IPE 159 003	159
IPE 216 003	216

Joint



	Ø int.	Ep.
IPE 050 004	50	64
IPE 070 004	70	87
IPE 089 004	89	112
IPE 108 004	108	124
IPE 133 004	133	146
IPE 159 004	159	180
IPE 216 004	216	254

Raccord mâle à souder (galva)



IPE 070 001	70
IPE 089 001	89
IPE 108 001	108
IPE 133 001	133
IPE 159 001	159
IPE 216 001	216

Raccord femelle à souder (galva)



IPE 070 002	70
IPE 089 002	89
IPE 108 002	108
IPE 133 002	133
IPE 159 002	159
IPE 216 002	216

Raccord mâle à souder (noir)



IPE 159 001N	159
--------------	-----

Bouchon femelle (galva)



IPE 070 005	70
IPE 089 005	89
IPE 108 005	108
IPE 133 005	133
IPE 159 005	159
IPE 216 005	216

Bouchon mâle (galva)



IPE 070 006	70
IPE 089 006	89
IPE 108 006	108
IPE 133 006	133
IPE 159 006	159
IPE 216 006	216

Raccord mâle / Cannelé (galva)



	Ø tuyau
IPE 070 008 063	70 x Ø 63
IPE 070 008 070	70 x Ø 70
IPE 070 008 076	70 x Ø 76
IPE 089 008 076	89 x Ø 76
IPE 089 008 089	89 x Ø 89
IPE 108 008 076	108 x Ø 76
IPE 108 008 089	108 x Ø 89
IPE 108 008 100	108 x Ø 100
IPE 108 008 108	108 x Ø 108
IPE 133 008 125	133 x Ø 125
IPE 159 008 080 *	159 x Ø 80
IPE 159 008 100 *	159 x Ø 100
IPE 159 008 125 *	159 x Ø 125
IPE 159 008 150	159 x Ø 150
IPE 159 008 151 *	159 x Ø 150
IPE 216 008 200	216 x Ø 200

* Avec poignée

Raccord femelle / Cannelé (galva)



	Ø tuyau
IPE 070 007 063	70 x Ø 63
IPE 070 007 070	70 x Ø 70
IPE 070 007 076	70 x Ø 76
IPE 089 007 076	89 x Ø 76
IPE 089 007 089	89 x Ø 89
IPE 108 007 076	108 x Ø 76
IPE 108 007 089	108 x Ø 89
IPE 108 007 100	108 x Ø 100
IPE 108 007 108	108 x Ø 108
IPE 133 007 125	133 x Ø 125
IPE 159 007 150	159 x Ø 150
IPE 216 007 200	216 x Ø 200

Raccords Perrot

Tous les raccords femelles sont livrés avec un joint.

Raccord mâle / Cannelé 90° (galva)



	Ø tuyau
IPE 108 153 100	108 x Ø 100
IPE 133 153 125	133 x Ø 125
IPE 159 153 150	159 x Ø 150

Raccord femelle / Cannelé 90° (galva)



	Ø tuyau
IPE 108 154 100	108 x Ø 100
IPE 133 154 125	133 x Ø 125
IPE 159 154 150	159 x Ø 150

Raccord mâle / Fileté mâle (galva)



IPE 070 015 200	70 x 2" M
IPE 070 015 212	70 x 2"1/2 M
IPE 070 015 300	70 x 3" M
IPE 089 015 212	89 x 2"1/2 M
IPE 089 015 300	89 x 3" M
IPE 108 015 300	108 x 3" M
IPE 108 015 400	108 x 4" M
IPE 133 015 500	133 x 5" M
IPE 159 015 400	159 x 4" M
IPE 159 015 600	159 x 6" M

Raccord femelle / Fileté mâle (galva)



IPE 070 014 200	70 x 2" M
IPE 070 014 212	70 x 2"1/2 M
IPE 070 014 300	70 x 3" M
IPE 089 014 212	89 x 2"1/2 M
IPE 089 014 300	89 x 3" M
IPE 108 014 300	108 x 3" M
IPE 108 014 400	108 x 4" M
IPE 133 014 500	133 x 5" M
IPE 159 014 600	159 x 6" M

Coude mâle / femelle 90° (galva)



IPE 070 025	70
IPE 089 025	89
IPE 108 025	108
IPE 133 025	133
IPE 159 025	159

Coude mâle / femelle 45° (galva)



IPE 070 155	70
IPE 089 155	89
IPE 108 155	108
IPE 133 155	133
IPE 159 155	159

Té M / M / F (galva)



IPE 070 030	70
IPE 089 030	89
IPE 108 030	108
IPE 133 030	133
IPE 159 030	159

Té M / F / F (galva)



IPE 070 160	70
IPE 089 160	89
IPE 108 160	108
IPE 133 160	133
IPE 159 160	159




Tous les raccords femelles sont livrés avec un joint.

Té M / F avec 1 sortie fileté (galva)



IPE 070 031 300	70 x 3" M
IPE 089 031 112	89 x 1 1/2"
IPE 089 031 300	89 x 3" M
IPE 108 031 200	108 x 2" M
IPE 108 031 300	108 x 3" M
IPE 108 031 400	108 x 4" M
IPE 133 031 500	133 x 5" M
IPE 159 031 200	159 x 2" M
IPE 159 031 300	159 x 3" M
IPE 159 031 400	159 x 4" M

Réduction F / M (galva)

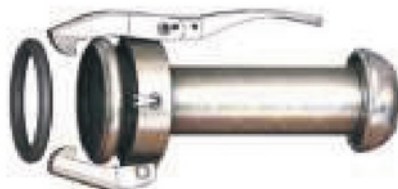

	F x M
IPE 133 039 108	133 x 108
IPE 159 039 108	159 x 108
IPE 159 039 133	159 x 133
IPE 216 039 159	216 x 159

Réduction M / F (galva)



	M x F
IPE 133 040 108	133 x 108
IPE 159 040 108	159 x 108
IPE 159 040 133	159 x 133
IPE 216 040 159	216 x 159

Jonction M / M (galva)



IPE 089 170	89
IPE 108 170	108
IPE 133 170	133
IPE 159 170	159
IPE 216 170	216

Jonction F / F (galva)



IPE 089 171	89
IPE 108 171	108
IPE 133 171	133
IPE 159 171	159

Raccord femelle : Bride carrée rapide



IPE 159 124 159

Tous les raccords femelles sont livrés avec un joint.

Raccord mâle / bride ronde (galva)



	Bride
IPE 089 046 080	89 x DN 80
IPE 108 046 100	108 x DN 100
IPE 108 046 150	108 x DN 150 *
IPE 108 046 200	108 x DN 200 *
IPE 133 046 125	133 x DN 125
IPE 133 046 150	133 x DN 150 *
IPE 133 046 200	133 x DN 200 *
IPE 159 046 150	159 x DN 150
IPE 159 046 200	159 x DN 200 *
IPE 216 046 200	216 x DN 200

* Livré en 2 pièces

Raccord femelle / bride ronde (galva)



	Bride
IPE 089 045 080	89 x DN 80
IPE 108 045 100	108 x DN 100
IPE 108 045 150	108 x DN 150 *
IPE 108 045 200	108 x DN 200 *
IPE 133 045 125	133 x DN 125
IPE 133 045 150	133 x DN 150 *
IPE 133 045 200	133 x DN 200 *
IPE 159 045 150	159 x DN 150
IPE 159 045 200	159 x DN 200 *
IPE 216 045 200	216 x DN 200

* Livré en 2 pièces

Raccord mâle / bride carrée (galva)



	Bride
IPE 108 116 150	108 x 150
IPE 133 116 150	133 x 150
IPE 159 116 150	159 x 150
IPE 216 116 180	216 x 180



	Bride	Purge
IPE 159 116 151	159 x 150	1" M
IPE 159 116 152	159 x 150	2" M

Raccord femelle / bride carrée (galva)



	Bride
IPE 108 115 150	108 x 150
IPE 133 115 150	133 x 150
IPE 159 115 150	159 x 150
IPE 216 115 180	216 x 180

Joint bride ronde



Voir page 65

Joint bride carrée



Voir page 65

Crépine mâle avec clapet (galva)



IPE 089 061	89
IPE 108 061	108
IPE 133 061	133
IPE 159 061	159

Crépine femelle avec clapet (galva)



IPE 089 063	89
IPE 108 063	108
IPE 133 063	133
IPE 159 063	159